

## PATENT COOPERATION TREATY

PCT

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Assistant Commissioner for Patents  
United States Patent and Trademark  
Office  
Box PCT  
Washington, D.C.20231  
ETATS-UNIS D'AMERIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 29 June 2000 (29.06.00)	
International application No. PCT/AU99/00946	Applicant's or agent's file reference 25550WOP00
International filing date (day/month/year) 01 November 1999 (01.11.99)	Priority date (day/month/year) 30 October 1998 (30.10.98)
Applicant RICHARDSON, Donald, George	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:

25 May 2000 (25.05.00)

☐ in a notice effecting later election filed with the International Bureau on:2. The election ☒ was☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland	Authorized officer Manu Berrod
Facsimile No.: (41-22) 740.14.35	Telephone No.: (41-22) 338.83.38

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU 99/00946

## A. CLASSIFICATION OF SUBJECT MATTER

Int Cl<sup>6</sup>: B65D 79/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: G08B 23/-, 25/-, B65D 79/02, G08G 1/127, B60P 3/20

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
AU: IPC as aboveElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
WPAT: with K/words

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 96/13022 A (HARJU B) 2 May 1996 Whole document	1-26
X	US 5552772 A (JANKY et al) 3 Sept 1996 Whole document	1-26
X	DE 19522392 A (HUBNER ELEKTRO UND SICHERHEITSSANLAGEN) 9 January 1997 Whole document	1-26

☒ Further documents are listed in the continuation of Box C☒ See patent family annex

## \* Special categories of cited documents:

- "A" Document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application out cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

15 December 1999

Date of mailing of the international search report

05 JAN 2000

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE  
PO BOX 200  
WODEN ACT 2606 AUSTRALIA  
E-mail address: pct@ipaustralia.gov.au  
Facsimile No.: (02) 6285 3929

Authorized officer

SOOSA GNANASINGHAM  
Telephone No.: (02) 6283 2172

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU 99/00946

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2710170 A (DIRLER SA) 24 March 1995 Whole document	1-26
X	DE 19649136 A (VOLKER D) 28 May 1998 Whole document	1-26
X	DE 29806583 U1 (HELICOM ENTWICKLUNGSGESSELLSCHAFT FUR TELEKOMMUNIKATION UND MEDIENTECHNIK MBH) 30 July 1998 Whole document	1-26
X	Derwent Abstract Accession No. 98-282020/25, class X22, JP 10097691 A (OKI ELECTRIC IND CO LTD), 14 April 1998 Abstract	1,12
X	Derwent Abstract Accession No. 97-409486/38, Class W01,W02,W06, JP 091 82145 A (ICOM KK) 11 July 1997 Abstract	1,12
X	Derwent Abstract Accession No. 98-135622/13, Class W05, JP 10011674 A (NIPPON DENKI IDO TSUSHIN) 16 January 1998 Abstract	1,12

# INTERNATIONAL SEARCH REPORT

## Information on patent family members

International application No.  
PCT/AU 99/00946

This Annex lists the known "A" publication level parent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member	
WO	96/13022	AU	38206/95

END OF ANNEX


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B65D 79/02</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/26111</b> (43) International Publication Date: 11 May 2000 (11.05.00)
<p>(21) International Application Number: PCT/AU99/00946</p> <p>(22) International Filing Date: 1 November 1999 (01.11.99)</p> <p>(30) Priority Data: PP 6863 30 October 1998 (30.10.98) AU</p> <p>(71)(72) Applicant and Inventor: RICHARDSON, Donald, George [AU/AU]; 90 Cutler Road, Clontarf, NSW 2093 (AU).</p> <p>(74) Agent: BALDWIN SHELSTON WATERS; 60 Margaret Street, Sydney, NSW 2000 (AU).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report.</i></p>	

(54) Title: A METHOD OF RECORDING THE TEMPERATURE OF PERISHABLE PRODUCTS IN COLD CHAIN DISTRIBUTION

## (57) Abstract

A method and apparatus for monitoring a consignment of goods including measuring a predetermined parameter or parameters of said consignment using a disposable device (7) attachable to said consignment; transmitting a signal containing data representative of the measured parameter to a central location (14) and maintaining a database (11) relating to said consignment at said central location (14), said database (11) including the data representative of said measured parameters. The database (11) may include temperature, time and location data associated with a consignment. The database (11) may be accessed remotely via a secure access link (15).

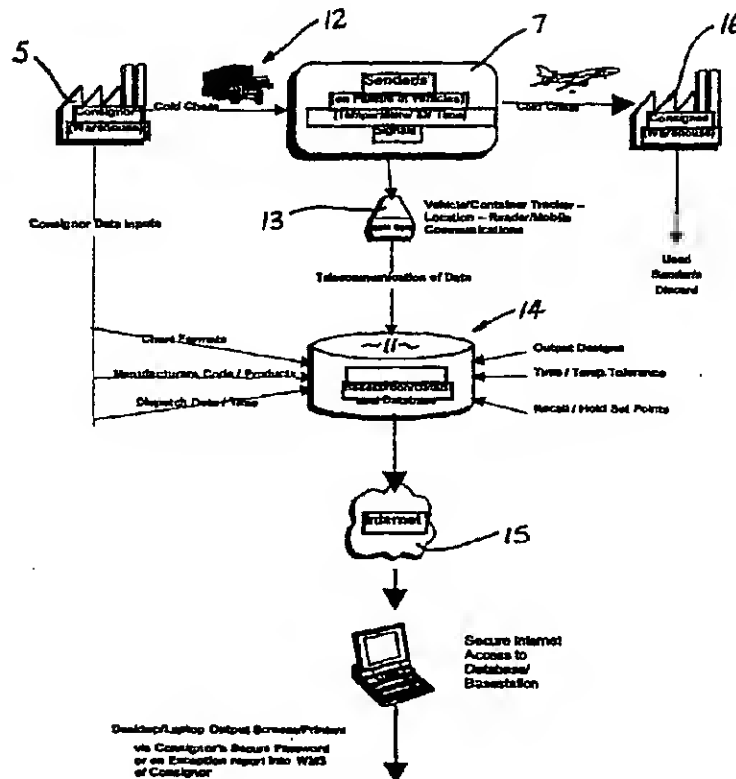

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TC	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KB	Republic of Korea	PL	Poland		
CN	China	KZ	Republic of Korea	PT	Portugal		
CU	Cuba	LC	Kazakhstan	RO	Romania		
CZ	Czech Republic	LI	Saint Lucia	RU	Russian Federation		
DE	Germany	LR	Liechtenstein	SD	Sudan		
DK	Denmark		Sri Lanka	SE	Sweden		
EE	Estonia		Liberia	SG	Singapore		

- 1 -

TITLE: A METHOD OF RECORDING THE TEMPERATURE OF PERISHABLE  
PRODUCTS IN COLD CHAIN DISTRIBUTION

TECHNICAL FIELD

5           The present invention relates to the continuous monitoring and ready retrieval of  
time, temperature and other consignment data of perishables products, as they are  
transported between processor (consignor) and ultimate retailer sites (consignee), along  
what is referred to as the cold chain, and, more particularly to a method and apparatus  
for enabling such monitoring in an efficient and low cost manner. Although the  
10   invention will be described in terms of its application to a cold chain, it will be  
appreciated that the invention is equally applicable to other forms of consignment  
system.

BACKGROUND ART

          There has been a significant trend to the use of more perishable, fresh, chilled  
15   (and frozen) foods, beverages and temperature sensitive biomedical and pharmaceutical  
products, compared with the temperature stable, processed or preserved substitute  
products. At the same time there is an increasing concern by consumers and  
governments to ensure the quality and safety of these temperature sensitive perishable  
products, is not jeopardised by hazardous handling prior to consumption. New  
20   temperature management tools are useful to minimise these handling hazards in  
domestic and international trade.

          Various types of temperature measurement and recording equipment have been  
used in the past for this task and record of these are discussed below.

- 2 -

The family of portable reusable data loggers that are placed in perishable product consignments by the shipper to be retrieved and the stored temperature and time data downloaded by either linking to a programmed personal computer, or by removing a printed chart, have been in use by the food and pharmaceutical industries for many years.

5 These robust, portable recorders are expensive and need to be returned to the shipper on consignment completion. Additionally the data is not accessible until the logger is ultimately read and this maybe after a product recall or hold, should have been triggered. This means that the monitoring device cannot be as widely used as safe product temperature management directs.

10 Refrigerated transportation vehicles and shipping containers used for perishable goods transfer have recording chart thermometers for recording the temperature of the interior space. These charts are specific for each vehicle in the cold chain and do not capture the product consignment temperature and time as the product moves between vehicles in the supply chain. It is therefore difficult to marry the charts with specific  
15 consignments on other than a post-mortem basis which is not as responsive as industry shippers would like, in terms of being able to anticipate and respond to potential temperature abuse hazards during distribution. As such they do not provide a seamless data stream throughout cold chain distribution.

The cumulative time and temperature effect is also indicated by a chemically  
20 based product, Monitor Mark™. These time/temperature integrators are monitoring tools that provide a visual, non reversible, indication of time and temperature exposure above a pre-set threshold temperature. This is accompanied by the appearance and migration of a blue colour, left to right through a series of viewing windows on a



- 3 -

rectangular flat laminate containing layers of paper film, adhesive and other active chemical components. These strips are typically 96mm by 20mm and while relatively inexpensive, only indicate, as distinct from measure, product exhibiting time temperature abuse sensitivity and represent a signal as to when product quality should be checked  
5 prior to use.

The temperature, time and location state of air-freight consignments of perishable products are also recorded in a specially designed aluminium 'Envirotainer'. This is a returnable unit, typically owned by the airline, and is a capital expensive solution to the problem of temperature management for just a part of the cold chain.

## 10 DISCLOSURE OF THE INVENTION

The present invention seeks to provide all the advantages of the above systems together while overcoming or at least ameliorating one or more of the disadvantages of the prior art. Desirably, at least in its embodiments, the invention will provide the advantages of being able to economically continuously monitor and record desired  
15 parameters (for example, temperature, time and location) of a consignment from the production point to the retailer warehouse or outlet. Preferably, where perishable goods are being consigned, the invention may provide in-built alerts to signal consignment temperature (or location) abuse from a specified condition and a potential spoilage predictor, consistent with the reduction of distribution related, food safety and food  
20 quality risks.

The present invention provides in one aspect, a method of monitoring a consignment of goods comprising the following steps:

- 4 -

measuring a predetermined parameter or parameters of said consignment using a disposable sender device attachable to said consignment;

transmitting a signal containing data representative of said measured parameter to a central location; and

5 maintaining a database relating to said consignment at said central location, said database including said data representative of said measured parameters.

Preferably, the parameter or parameters are measured continuously or at predetermined intervals and said data includes time indicative data associated with said measurements. For preference, the method includes the step of communicating the data  
10 to an intermediate sender device provided at the location of the consignment and transmitting the collected data from the intermediate sender device to the central location.

Preferably the method further includes the step of determining the location of the consignment and including data representative of the determined location in the data  
15 transmitted to the central location.

For preference, the database includes set point values associated with the consignment for one or more of the measured parameters and the method includes comparing measured values with corresponding set point values to determine whether the consignment is meeting predetermined conditions.

20 According to a second aspect the present invention provides a system for monitoring a consignment of goods including:

a sender device attachable to said consignment including a measurement means for measuring a predetermined parameter or parameters of said consignment;

- 5 -

first communication means for transmitting a signal containing data representative of said measured parameter to a central location; and

computer system means for maintaining a database relating to said consignment at said central location, said database including said data representative of said measured  
5 parameters.

Preferably, the system includes the first communication means in said sender device for communicating the data to an intermediate sender device provided at the location of the consignment and a second communication means being included in the intermediate sender device for transmitting the data from the intermediate sender device  
10 to the central location.

For preference, the system includes a location determining means for determining the location of the consignment and means for including data representative of the determined location in the data transmitted to the central location.

In one embodiment the attachable sender device is a small adhesively backed,  
15 robustly designed, inexpensive and non-returnable, battery powered, temperature monitor and sender. This sender device is fastened to pallet loads of perishable products that may require shipment between specified temperature ranges to ensure food safety risks are eliminated and food quality is maximised. Typically, chilled foods being kept at 4°C or below and frozen foods at -18°C or below.

20 Preferably, the sender/s and tracker are generating location and time data signals, together with the accurate temperature signals, and these signals are communicated to a central database operated on behalf of numerous perishables freight originators. Such mobile communication of simple data signals is via appropriate technologies depending

- 6 -

on specifics of location tracking discrimination, and global location, but normally would be via global systems for mobile phone (GSM) for terrestrial movements, together with triangulation for reasonable location precision and, via satellites for global positioning system (GPS), for more precise location data and certain specific country applications.

5 Preferably, the signals sent to the central database by the sender are integrated with other consignment data. This other data can be sent directly and electronically to the database by the consignment originator, such as dispatch date, time, product and manufacturing code, time/temperature tolerance ranges for abuse determination and recall alert, together with, preferred report page layout formats and company  
10 identification headers, for the ultimate output printing or communicating, in terms of time/temperature/location plots, including geographic charts for visual tracking purposes.

Preferably, the signals are sent by senders attached to pallet loads of perishable products being transported both domestically and internationally, with likely transit  
15 times from overnight, to 30+days duration, in the case of refrigerated containerised shipments on international routes. Senders for different temperature and time ranges may have differing battery lives, designed temperature ranges and associated distinguishing marks to facilitate easy sender product selection and use.

Typically, the signal functionality and pitch intervals of the sender is kept to a  
20 minimum and the database infrastructure provides as much consignment information as possible for overall data processing, to ensure that the manufactured cost and price of the disposable, mass produced senders, is low in relation to the profit potential of each pallet consigned. Low sender prices motivate high usage of the system, consistent with

- 7 -

enhancing the safety and quality of the cold chain in this country and its export markets. Superior supply chain performance enhances overall competitiveness in global business. The system permits transparent scrutiny of supply chain service providers delivery and ready measurement of their key performance indicators including driver stops and

5 fatigue.

Typically, the central data-base is accessed by the consignor via Internet communication linkup, on a secure basis, by logging onto the system with a password via a desktop, or laptop or portable computer, in an office, or from the field, location and the specific details of every pallet consigned with a sensor, can then be viewed or printed  
10 out, via the consignor's home page. The regular or automatic interrogation of the system confirms safe shipment progress or shipment completion, but also additionally identifies any abused shipment and its location for earlier recall intervention, if required.

Alternatively, the central data-base can be selectively and securely linked to a consignee's mainframe computer system so that information is automatically captured  
15 and exception reporting and recall alerts only require management intervention.

Preferably, the accuracy of the temperature data provided (0.5°C accuracy) in hard copy form can be so calibrated and validated as to provide a solid legal foundation for consignor dialogue with receiving party and transporting parties and so facilitate dispute resolution between such parties, minimise the effect of the human frailties  
20 inherent in the current supply cold chain, and generally provide a tool for heightening awareness of the importance of the cold chain management in providing safe, quality food and other perishables.

- 8 -

Typically, pallet loads of perishable products (or smaller units than a pallet, such as a single shipping carton in the case of high value products like certain live or chilled seafood or biomedical / pharmaceuticals) are transhipped from processor or consignor by refrigerated truck, railcar, shipping container and ultimately by air-freight in certain cases, before reaching their destination. The communication of the specific sender signal has therefore some barriers to ready transmission. For this reason the sender may have a limited capacity memory, to retain the signal stream until the transmission interruption ends and once again allows signal to be sent to the central data-base.

In the preferred embodiment of the invention, the sender signal stream from a loaded truck or shipping container, may in the first instance be received by an on-board reader/tracker, tuned to the system rf signal frequency to minimise such interference, and then communicated to the central database for real-time integration of the perishable shipment's temperature and location status, with the other company specific data. The other company data may be consistent with scannable EAN128/SSCC (Serial Shipping Container Code), together with certain specific keyed in data, like sender identity.

Other embodiments of the invention can have only part of the sender system capability being used at times, for instance as an intelligent consignment tag, where location data is important but temperature ignored, as in very valuable dry goods distribution where pilfering and consignment theft are a risk - cigarettes/whisky; or, in instances where the temperature data and alert capability is important, but location data ignored, as in storage of frozen products in a coldstore, where a hotline message from the database could alert management that the coldstore had developed a fault during a period when unattended, and that stored product temperatures were rising dangerously.

- 9 -

## BRIEF DESCRIPTION OF DRAWINGS

The invention will be more fully understood from the following description of a preferred embodiment which is illustrated, by way of example only, with reference to the accompanying drawings in which:

5        Figure 1 is a schematic block diagram of the information system network according to one embodiment of the invention;

Figure 2 shows a side elevation of an attachable sender device according to one embodiment of the invention;

Figure 3 is a diagram of the consignor's Input Data Report format; and

10       Figure 4 is a diagram of a typical output status report printed from the central data-base, via the Internet at the consignor's desktop computer, showing the temperature and travel time history to the current location, in real time.

## MODES FOR CARRYING OUT THE INVENTION

Referring to the Figures, the consignor warehouseman 5 of a perishable product 6  
15       selects the correct sender device 7 for the specific duty and attaches that sender device 7 by peel back adhesive tab 8 to the pallet consignment (not shown) at an optimum and designated position. The sender device 7 is activated at the time of dispatch by pulling tag 9 that irreversibly activates a battery, and, the sender specific data, which is normally indicated on the sender casing 10 by a label or other readable indicia (e.g. barcode), is  
20       then entered into the central database 11 by the warehouseman 5 (sender number, manufactures code for product, customer, date, time, report format, etc.) from his desk top computer, via modem linkage to the central database 11. An example of the consignment attribute data is shown in Figure 3. During a consignment's movement

- 10 -

along the cold chain 12 the sender device 7 transmits its data stream (via reader/tracker 13 as required) to the database 11 at a central location 14 where it is integrated with the stored data from warehouseman 5 in the database 11 for retrieval by Internet connection 15 by the consignor, at any convenient time and from any convenient location by the use of the consignor's specific password at the time of logging onto the system. An example of the type of information available is shown in Figure 4. The sender device 7 is removed from the consignment at the end of the cold chain 12 with the battery drained, and is responsibly disposed of by consignee warehouse 16 staff, on the formal receipt of the perishable product shipment.

10       The consignor now has an exact temperature record of the delivery of the shipment to a specific distribution warehouse, possibly on the other side of the continent, or into demanding export markets, after pallet/s has been transhipped a number of times from truck to railcar to container ship or plane to truck. The consignor knows the temperature, location, identity of the shipment, and the ultimate customer warehouse  
15       location, in real-time, right up to delivery acceptance by the customer. Additionally the consignor has an in-built integrator of time and temperature abuse, which would signal the need to recall (or hold) the particular pallet, due to some distribution failure and hence safety or quality concern.

          The use of this information systems approach to consignment temperature  
20       management along the cold chain indicates the shipper's responsible attitude to the superior delivery of its products and protects and enhances the consignor's corporate identity in the market place.



- 11 -

In the preferred operation of the system, responsible shippers of perishable products adopting the system, would be able to negotiate more favourable insurance premiums for the in-transit protection of their product so adding to the overall cost benefit of the adopted temperature management system. Additionally the consignor can  
5 easily maintain electronic records of past shipments for ready retrieval, should later insurance or quality disputes arise. The past consignment data can be kept for as long as the consignor deems necessary.

It will be appreciated that standard componentry such as miniature transmitters, temperature monitors and other standard forms of communication equipment can be  
10 used to implement the invention, though in some cases it would be desirable to use custom designed hardware.

It will be apparent that further embodiments and exemplifications of the invention are possible without departing from the spirit or scope of the invention described.

## CLAIMS:-

1. A method of monitoring a consignment of goods including the following steps:  
5       measuring a predetermined parameter or parameters of said consignment using a  
disposable sender device attachable to said consignment;  
transmitting a signal containing data representative of said measured parameter to  
a central location;  
maintaining a database relating to said consignment at said central location, said  
10   database including said data representative of said measured parameters.
2. A method of monitoring according to claim 1 wherein said parameter or  
parameters are measured continuously or at predetermined intervals and said data  
includes time indicative data associated with said measurements.
3. A method of monitoring according to claim 2 wherein the parameter is the  
15   temperature of the consignment.
4. A method of monitoring according to claim 1 or claim 2 including the step of  
communicating the data to an intermediate sender device provided at the location of the  
consignment and transmitting the data from the intermediate sender device to said  
central location.
- 20   5. A method of monitoring according to claim 4 including the step of determining  
the location of the consignment and including data representative of the determined  
location in said data transmitted to said central location.

6. A method of monitoring according to any one of the preceding claims including the step of storing said data in a storage means before transmission to said central location.
7. A method of monitoring according to claim 6 when appended to claims 4 or 5 wherein said storage means is provided in said intermediate sender device.
8. A method of monitoring according to anyone of the preceding claims wherein said database includes set point values associated with said consignment for one or more of said measured parameters and the method includes comparing measured values with corresponding set point values to determine whether the consignment is meeting predetermined conditions.
9. A method of monitoring according to claim 8 wherein said database includes consignment data for each consignment, including dispatch and product data.
10. A method of monitoring according to any one of the preceding claims including the step of providing secure communication access to said database to enable monitoring by enabled users of data available from said database.
11. A method of monitoring according to claim 10 wherein said secure communication access is provided via the Internet.
12. A system for monitoring a consignment of goods including:  
a sender device attachable to said consignment including a measurement means for measuring a predetermined parameter or parameters of said consignment;  
first communication means for transmitting a signal containing data representative of said measured parameter to a central location;

- 14 -

computer system means for maintaining a database relating to said consignment at said central location, said database including said data representative of said measured parameters.

13. A system for monitoring according to claim 12 wherein said parameter or  
5 parameters are measured continuously or at predetermined intervals and said data includes time indicative data associated with said measurements.

14. A system for monitoring according to claim 13 wherein the parameter is the temperature of the consignment.

15. A system for monitoring according to claim 12, claim 13 or claim 14 wherein  
10 said first communication means is included in said sender device for communicating the data to an intermediate sender device provided at the location of the consignment and a second communication means being included in said intermediate sender device for transmitting the data from the intermediate sender device to said central location.

16. A system for monitoring according to claim 15 including location determining  
15 means for determining the location of the consignment and means for including data representative of the determined location in said data transmitted to said central location.

17. A system for monitoring according to claim 16 wherein said location determining means includes a global positioning system.

18. A system for monitoring according to claim 16 or 17 wherein said location  
20 determining means is included in said intermediate sender device.

19. A system for monitoring according to any one of claims 12 to 18 including a storage means for storing said data before transmission to said central location.

- 15 -

20. A system for monitoring according to claim 19 when appended to any one of claims 15 to 18 wherein said storage means is provided in said intermediate sender device.

21. A system for monitoring according to any one of claims 12 to 20 wherein the  
5 sender device is disposable and battery powered.

22. A system for monitoring according to any one of claims 12 to 20 wherein the sender device is disposable and inductively powered from said intermediate sender device.


23. A system for monitoring according to anyone of claims 12 to 22 wherein said  
10 database includes set point values associated with said consignment for one or more of said measured parameters and said computer system means includes comparison means for comparing measured values with corresponding set point values to determine whether the consignment is meeting predetermined conditions.

24. A system for monitoring according to claim 23 wherein said database includes  
15 consignment data for each consignment, including dispatch and product data.

25. A system for monitoring according to any one of claims. 12 to 24 including a secure communication access means for providing access to said database to enable monitoring by enabled users of data available from said database.

26. A system for monitoring according to claim 25 wherein said secure  
20 communication access means provides said access via the Internet.

1/4

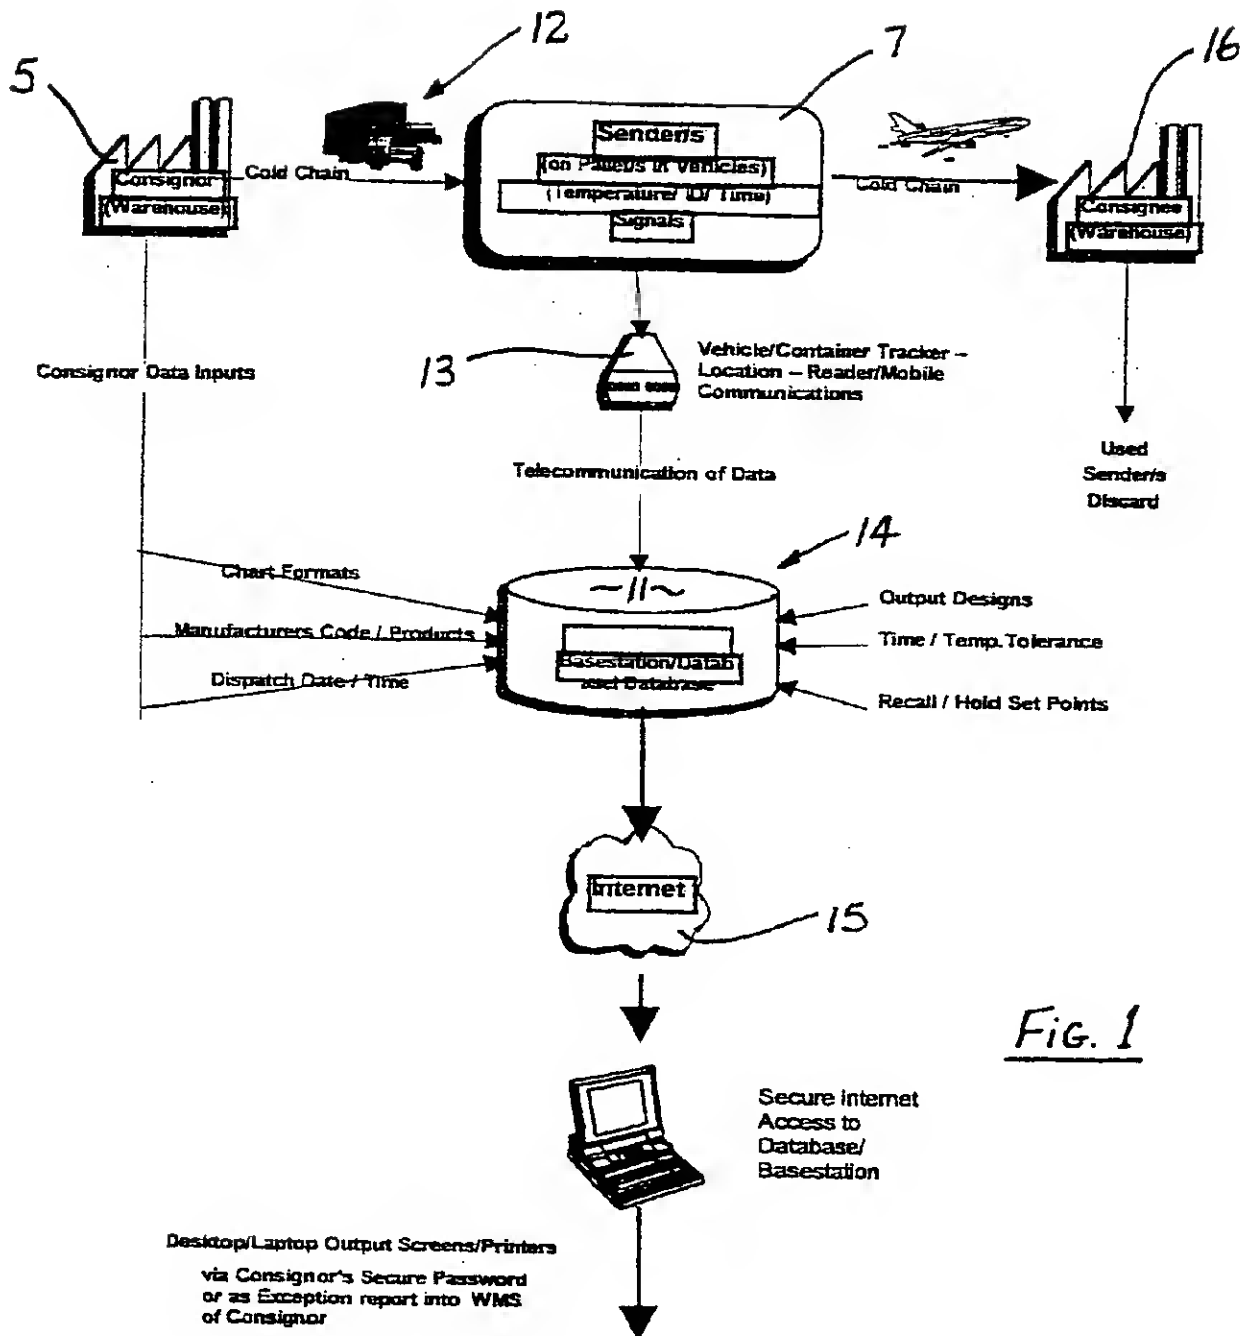Fig. 1

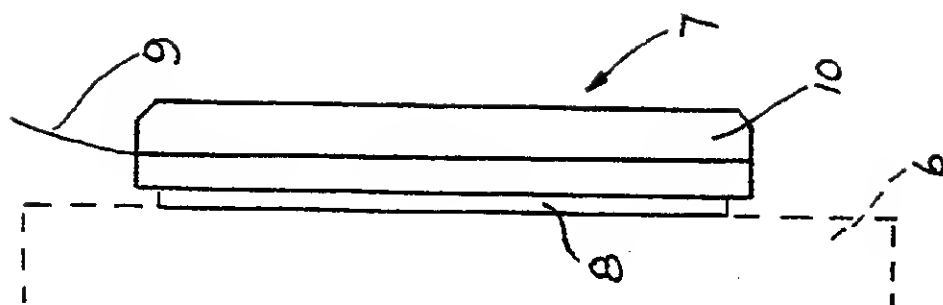


FIG. 2

Consignor Password (secure ****)	<b><u>Consignor Input Data for XYZ System</u></b> (Keyed into computer at time of Loading) Green      Blue      Black      Red
<b><u>Consignment Attributes</u></b>	
Sender Type / Colour	
Sender Serial Number (***)	
Date / Time (yyyy/mm/dd/hh/mm)	
Expected Transit Time (dy/hr)	
Maximum Transit Temperature (°C)	
Pitch (Report signal interval in min.)	
Hotline Number (** ** ****)	
Alert 1 (red line) - Over Temperature (°C)	
Alert 2 (blue line) - Under Temperature (°C)	
Consignor Company Code	
Consignor Location Code	
Consignor Product Code	
Consignor Batch Identity Code	
Consignee Order Number	
Consignee Destination (Country/City)	


Fig. 3



4 / 4

Figure 4.  
CONSIGNMENT TEMPERATURE / TIME CHART

11

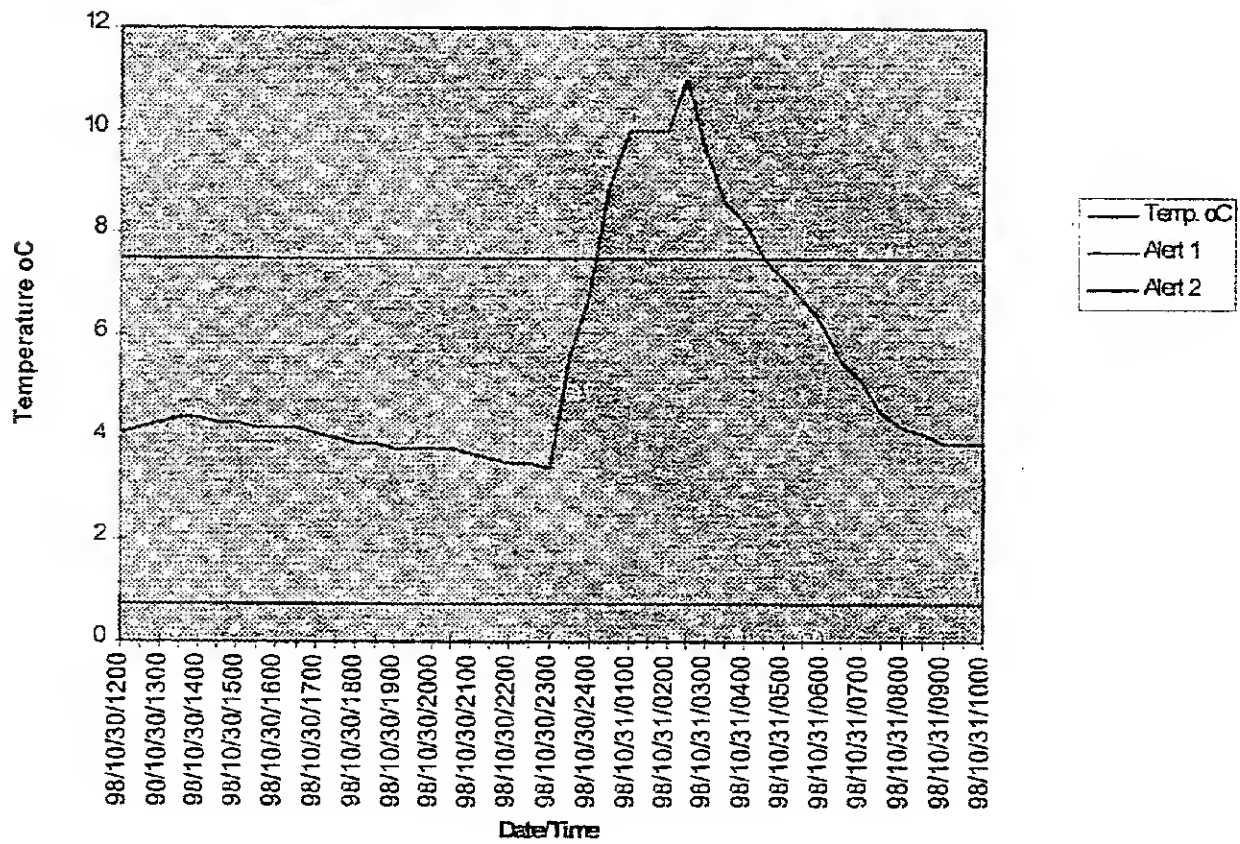

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU 99/00946

## A. CLASSIFICATION OF SUBJECT MATTER

Int Cl<sup>6</sup>: B65D 79/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: G08B 23/-, 25/-, B65D 79/02, G08G 1/127, B60P 3/20

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

AU: IPC as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPAT: with K/words

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 96/13022 A (HARJU B) 2 May 1996 Whole document	1-26
X	US 5552772 A (JANKY et al) 3 Sept 1996 Whole document	1-26
X	DE 19522392 A (HUBNER ELEKTRO UND SICHERHEITSSANLAGEN) 9 January 1997 Whole document	1-26

☒ Further documents are listed in the continuation of Box C

☒ See patent family annex

\* Special categories of cited documents:

"A" Document defining the general state of the art which is not considered to be of particular relevance  
 "E" earlier application or patent but published on or after the international filing date  
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
 "O" document referring to an oral disclosure, use, exhibition or other means  
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
 "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
 "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art  
 "&" document member of the same patent family

Date of the actual completion of the international search

15 December 1999

Date of mailing of the international search report

05 JAN 2000

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE  
 PO BOX 200  
 WODEN ACT 2606 AUSTRALIA  
 E-mail address: pct@ipaustalia.gov.au  
 Facsimile No.: (02) 6285 3929

Authorized officer

SOOSA GNANASINGHAM  
 Telephone No.: (02) 6283 2172

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU 99/00946

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2710170 A (DIRLER SA) 24 March 1995 Whole document	1-26
X	DE 19649136 A (VOLKER D) 28 May 1998 Whole document	1-26
X	DE 29806583 U1 (HELICOM ENTWICKLUNGSGESSELLSCHAFT FUR TELEKOMMUNIKATION UND MEDIEN-TECHNIK MBH) 30 July 1998 Whole document	1-26
X	Derwent Abstract Accession No. 98-282020/25, class X22, JP 10097691 A (OKI ELECTRIC IND CO LTD), 14 April 1998 Abstract	1,12
X	Derwent Abstract Accession No. 97-409486/38, Class W01,W02,W06, JP 091 82145 A (ICOM KK) 11 July 1997 Abstract	1,12
X	Derwent Abstract Accession No. 98-135622/13, Class W05, JP 10011674 A (NIPPON DENKI IDO TSUSHIN) 16 January 1998 Abstract	1,12

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.  
**PCT/AU 99/00946**

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member	
WO	96/13022	AU	38206/95

END OF ANNEX



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B65D 79/02</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/26111</b>
		(43) International Publication Date: 11 May 2000 (11.05.00)

(21) International Application Number: PCT/AU99/00946

(22) International Filing Date: 1 November 1999 (01.11.99)

(30) Priority Data:  
PP 6863 30 October 1998 (30.10.98) AU

(71)(72) Applicant and Inventor: RICHARDSON, Donald,  
George [AU/AU]; 90 Cutler Road, Clontarf, NSW 2093  
(AU).

(74) Agent: BALDWIN SHELSTON WATERS; 60 Margaret  
Street, Sydney, NSW 2000 (AU).


(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG,  
BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE,  
ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP,  
KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,  
MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU,  
SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG,  
US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE,  
LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM,  
AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT,  
BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,  
MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published**  
*With international search report.*

(54) Title: A METHOD OF RECORDING THE TEMPERATURE OF PERISHABLE PRODUCTS IN COLD CHAIN DISTRIBUTION

## (57) Abstract

A method and apparatus for monitoring a consignment of goods including measuring a predetermined parameter or parameters of said consignment using a disposable device (7) attachable to said consignment; transmitting a signal containing data representative of the measured parameter to a central location (14) and maintaining a database (11) relating to said consignment at said central location (14), said database (11) including the data representative of said measured parameters. The database (11) may include temperature, time and location data associated with a consignment. The database (11) may be accessed remotely via a secure access link (15).

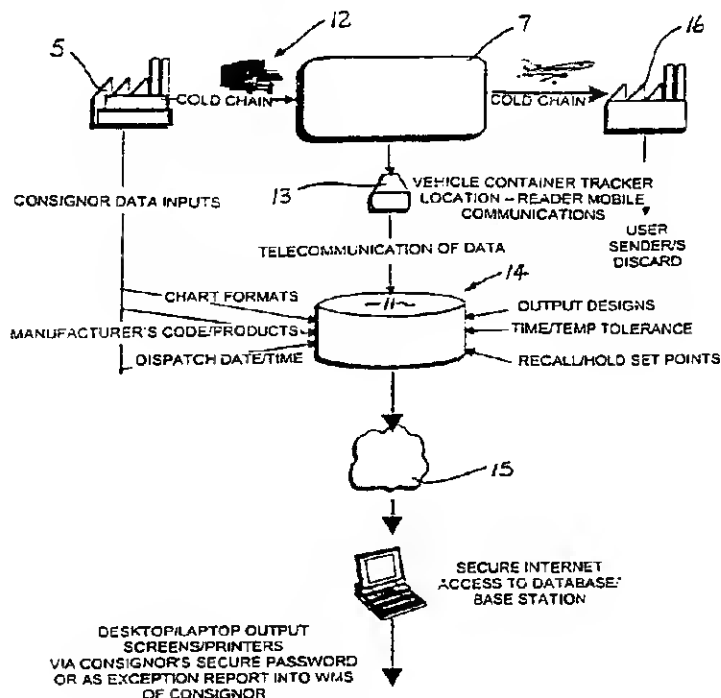

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

- 1 -

TITLE: A METHOD OF RECORDING THE TEMPERATURE OF PERISHABLE  
PRODUCTS IN COLD CHAIN DISTRIBUTION

TECHNICAL FIELD

5           The present invention relates to the continuous monitoring and ready retrieval of time, temperature and other consignment data of perishables products, as they are transported between processor (consignor) and ultimate retailer sites (consignee), along what is referred to as the cold chain, and, more particularly to a method and apparatus for enabling such monitoring in an efficient and low cost manner. Although the  
10   invention will be described in terms of its application to a cold chain, it will be appreciated that the invention is equally applicable to other forms of consignment system.

BACKGROUND ART

          There has been a significant trend to the use of more perishable, fresh, chilled  
15   (and frozen) foods, beverages and temperature sensitive biomedical and pharmaceutical products, compared with the temperature stable, processed or preserved substitute products. At the same time there is an increasing concern by consumers and governments to ensure the quality and safety of these temperature sensitive perishable products, is not jeopardised by hazardous handling prior to consumption. New  
20   temperature management tools are useful to minimise these handling hazards in domestic and international trade.

          Various types of temperature measurement and recording equipment have been used in the past for this task and record of these are discussed below.

- 2 -

The family of portable reusable data loggers that are placed in perishable product consignments by the shipper to be retrieved and the stored temperature and time data downloaded by either linking to a programmed personal computer, or by removing a printed chart, have been in use by the food and pharmaceutical industries for many years.

5 These robust, portable recorders are expensive and need to be returned to the shipper on consignment completion. Additionally the data is not accessible until the logger is ultimately read and this maybe after a product recall or hold, should have been triggered. This means that the monitoring device cannot be as widely used as safe product temperature management directs.

10 Refrigerated transportation vehicles and shipping containers used for perishable goods transfer have recording chart thermometers for recording the temperature of the interior space. These charts are specific for each vehicle in the cold chain and do not capture the product consignment temperature and time as the product moves between vehicles in the supply chain. It is therefore difficult to marry the charts with specific  
15 consignments on other than a post-mortem basis which is not as responsive as industry shippers would like, in terms of being able to anticipate and respond to potential temperature abuse hazards during distribution. As such they do not provide a seamless data stream throughout cold chain distribution.

The cumulative time and temperature effect is also indicated by a chemically  
20 based product, Monitor Mark™. These time/temperature integrators are monitoring tools that provide a visual, non reversible, indication of time and temperature exposure above a pre-set threshold temperature. This is accompanied by the appearance and migration of a blue colour, left to right through a series of viewing windows on a



- 3 -

rectangular flat laminate containing layers of paper film, adhesive and other active chemical components. These strips are typically 96mm by 20mm and while relatively inexpensive, only indicate, as distinct from measure, product exhibiting time temperature abuse sensitivity and represent a signal as to when product quality should be checked

5 prior to use.

The temperature, time and location state of air-freight consignments of perishable products are also recorded in a specially designed aluminium 'Envirotainer'. This is a returnable unit, typically owned by the airline, and is a capital expensive solution to the problem of temperature management for just a part of the cold chain.

## 10 DISCLOSURE OF THE INVENTION

The present invention seeks to provide all the advantages of the above systems together while overcoming or at least ameliorating one or more of the disadvantages of the prior art. Desirably, at least in its embodiments, the invention will provide the advantages of being able to economically continuously monitor and record desired  
15 parameters (for example, temperature, time and location) of a consignment from the production point to the retailer warehouse or outlet. Preferably, where perishable goods are being consigned, the invention may provide in-built alerts to signal consignment temperature (or location) abuse from a specified condition and a potential spoilage predictor, consistent with the reduction of distribution related, food safety and food  
20 quality risks.

The present invention provides in one aspect, a method of monitoring a consignment of goods comprising the following steps:

- 4 -

measuring a predetermined parameter or parameters of said consignment using a disposable sender device attachable to said consignment;

transmitting a signal containing data representative of said measured parameter to a central location; and

5 maintaining a database relating to said consignment at said central location, said database including said data representative of said measured parameters.

Preferably, the parameter or parameters are measured continuously or at predetermined intervals and said data includes time indicative data associated with said measurements. For preference, the method includes the step of communicating the data  
10 to an intermediate sender device provided at the location of the consignment and transmitting the collected data from the intermediate sender device to the central location.

Preferably the method further includes the step of determining the location of the consignment and including data representative of the determined location in the data  
15 transmitted to the central location.

For preference, the database includes set point values associated with the consignment for one or more of the measured parameters and the method includes comparing measured values with corresponding set point values to determine whether the consignment is meeting predetermined conditions.

20 According to a second aspect the present invention provides a system for monitoring a consignment of goods including:

a sender device attachable to said consignment including a measurement means for measuring a predetermined parameter or parameters of said consignment;

- 5 -

first communication means for transmitting a signal containing data representative of said measured parameter to a central location; and

computer system means for maintaining a database relating to said consignment at said central location, said database including said data representative of said measured  
5 parameters.

Preferably, the system includes the first communication means in said sender device for communicating the data to an intermediate sender device provided at the location of the consignment and a second communication means being included in the intermediate sender device for transmitting the data from the intermediate sender device  
10 to the central location.

For preference, the system includes a location determining means for determining the location of the consignment and means for including data representative of the determined location in the data transmitted to the central location.

In one embodiment the attachable sender device is a small adhesively backed,  
15 robustly designed, inexpensive and non-returnable, battery powered, temperature monitor and sender. This sender device is fastened to pallet loads of perishable products that may require shipment between specified temperature ranges to ensure food safety risks are eliminated and food quality is maximised. Typically, chilled foods being kept at 4°C or below and frozen foods at -18°C or below.

20 Preferably, the sender/s and tracker are generating location and time data signals, together with the accurate temperature signals, and these signals are communicated to a central database operated on behalf of numerous perishables freight originators. Such mobile communication of simple data signals is via appropriate technologies depending

- 6 -

on specifics of location tracking discrimination, and global location, but normally would be via global systems for mobile phone (GSM) for terrestrial movements, together with triangulation for reasonable location precision and, via satellites for global positioning system (GPS), for more precise location data and certain specific country applications.

5            Preferably, the signals sent to the central database by the sender are integrated with other consignment data. This other data can be sent directly and electronically to the database by the consignment originator, such as dispatch date, time, product and manufacturing code, time/temperature tolerance ranges for abuse determination and recall alert, together with, preferred report page layout formats and company  
10    identification headers, for the ultimate output printing or communicating, in terms of time/temperature/location plots, including geographic charts for visual tracking purposes.

            Preferably, the signals are sent by senders attached to pallet loads of perishable products being transported both domestically and internationally, with likely transit  
15    times from overnight, to 30+days duration, in the case of refrigerated containerised shipments on international routes. Senders for different temperature and time ranges may have differing battery lives, designed temperature ranges and associated distinguishing marks to facilitate easy sender product selection and use.

            Typically, the signal functionality and pitch intervals of the sender is kept to a  
20    minimum and the database infrastructure provides as much consignment information as possible for overall data processing, to ensure that the manufactured cost and price of the disposable, mass produced senders, is low in relation to the profit potential of each pallet consigned. Low sender prices motivate high usage of the system, consistent with

- 7 -

enhancing the safety and quality of the cold chain in this country and its export markets. Superior supply chain performance enhances overall competitiveness in global business. The system permits transparent scrutiny of supply chain service providers delivery and ready measurement of their key performance indicators including driver stops and

5 fatigue.

Typically, the central data-base is accessed by the consignor via Internet communication linkup, on a secure basis, by logging onto the system with a password via a desktop, or laptop or portable computer, in an office, or from the field, location and the specific details of every pallet consigned with a sensor, can then be viewed or printed  
10 out, via the consignor's home page. The regular or automatic interrogation of the system confirms safe shipment progress or shipment completion, but also additionally identifies any abused shipment and its location for earlier recall intervention, if required. Alternatively, the central data-base can be selectively and securely linked to a consignee's mainframe computer system so that information is automatically captured  
15 and exception reporting and recall alerts only require management intervention.

Preferably, the accuracy of the temperature data provided (0.5°C accuracy) in hard copy form can be so calibrated and validated as to provide a solid legal foundation for consignor dialogue with receiving party and transporting parties and so facilitate dispute resolution between such parties, minimise the effect of the human frailties  
20 inherent in the current supply cold chain, and generally provide a tool for heightening awareness of the importance of the cold chain management in providing safe, quality food and other perishables.

Typically, pallet loads of perishable products (or smaller units than a pallet, such as a single shipping carton in the case of high value products like certain live or chilled seafood or biomedical / pharmaceuticals) are transhipped from processor or consignor by refrigerated truck, railcar, shipping container and ultimately by air-freight in certain cases, before reaching their destination. The communication of the specific sender signal has therefore some barriers to ready transmission. For this reason the sender may have a limited capacity memory, to retain the signal stream until the transmission interruption ends and once again allows signal to be sent to the central data-base.

In the preferred embodiment of the invention, the sender signal stream from a loaded truck or shipping container, may in the first instance be received by an on-board reader/tracker, tuned to the system rf signal frequency to minimise such interference, and then communicated to the central database for real-time integration of the perishable shipment's temperature and location status, with the other company specific data. The other company data may be consistent with scannable EAN128/SSCC (Serial Shipping Container Code), together with certain specific keycd in data, like sender identity.

Other embodiments of the invention can have only part of the sender system capability being used at times, for instance as an intelligent consignment tag, where location data is important but temperature ignored, as in very valuable dry goods distribution where pilfering and consignment theft are a risk - cigarettes/whisky; or, in instances where the temperature data and alert capability is important, but location data ignored, as in storage of frozen products in a coldstore, where a hotline message from the database could alert management that the coldstore had developed a fault during a period when unattended, and that stored product temperatures were rising dangerously.

## BRIEF DESCRIPTION OF DRAWINGS

The invention will be more fully understood from the following description of a preferred embodiment which is illustrated, by way of example only, with reference to the accompanying drawings in which:

5        Figure 1 is a schematic block diagram of the information system network according to one embodiment of the invention;

Figure 2 shows a side elevation of an attachable sender device according to one embodiment of the invention;

Figure 3 is a diagram of the consignor's Input Data Report format; and

10       Figure 4 is a diagram of a typical output status report printed from the central data-base, via the Internet at the consignor's desktop computer, showing the temperature and travel time history to the current location, in real time.

## MODES FOR CARRYING OUT THE INVENTION

Referring to the Figures, the consignor warehouseman 5 of a perishable product 6  
15       selects the correct sender device 7 for the specific duty and attaches that sender device 7 by peel back adhesive tab 8 to the pallet consignment (not shown) at an optimum and designated position. The sender device 7 is activated at the time of dispatch by pulling tag 9 that irreversibly activates a battery, and, the sender specific data, which is normally indicated on the sender casing 10 by a label or other readable indicia (e.g. barcode), is  
20       then entered into the central database 11 by the warehouseman 5 (sender number, manufactures code for product, customer, date, time, report format, etc.) from his desktop computer, via modem linkage to the central database 11. An example of the consignment attribute data is shown in Figure 3. During a consignment's movement

- 10 -

along the cold chain 12 the sender device 7 transmits its data stream (via reader/tracker 13 as required) to the database 11 at a central location 14 where it is integrated with the stored data from warehouseman 5 in the database 11 for retrieval by Internet connection 15 by the consignor, at any convenient time and from any convenient location by the use of the consignor's specific password at the time of logging onto the system. An example of the type of information available is shown in Figure 4. The sender device 7 is removed from the consignment at the end of the cold chain 12 with the battery drained, and is responsibly disposed of by consignee warehouse 16 staff, on the formal receipt of the perishable product shipment.

10           The consignor now has an exact temperature record of the delivery of the shipment to a specific distribution warehouse, possibly on the other side of the continent, or into demanding export markets, after pallet/s has been transhipped a number of times from truck to railcar to container ship or plane to truck. The consignor knows the temperature, location, identity of the shipment, and the ultimate customer warehouse location, in real-time, right up to delivery acceptance by the customer. Additionally the 15 consignor has an in-built integrator of time and temperature abuse, which would signal the need to recall (or hold) the particular pallet, due to some distribution failure and hence safety or quality concern.

          The use of this information systems approach to consignment temperature 20 management along the cold chain indicates the shipper's responsible attitude to the superior delivery of its products and protects and enhances the consignor's corporate identity in the market place.



- 11 -

In the preferred operation of the system, responsible shippers of perishable products adopting the system, would be able to negotiate more favourable insurance premiums for the in-transit protection of their product so adding to the overall cost benefit of the adopted temperature management system. Additionally the consignor can  
5 easily maintain electronic records of past shipments for ready retrieval, should later insurance or quality disputes arise. The past consignment data can be kept for as long as the consignor deems necessary.

It will be appreciated that standard componentry such as miniature transmitters, temperature monitors and other standard forms of communication equipment can be  
10 used to implement the invention, though in some cases it would be desirable to use custom designed hardware.

It will be apparent that further embodiments and exemplifications of the invention are possible without departing from the spirit or scope of the invention described.

## CLAIMS:-

1. A method of monitoring a consignment of goods including the following steps:  
5 measuring a predetermined parameter or parameters of said consignment using a disposable sender device attachable to said consignment;  
transmitting a signal containing data representative of said measured parameter to a central location;  
maintaining a database relating to said consignment at said central location, said  
10 database including said data representative of said measured parameters.
2. A method of monitoring according to claim 1 wherein said parameter or parameters are measured continuously or at predetermined intervals and said data includes time indicative data associated with said measurements.
3. A method of monitoring according to claim 2 wherein the parameter is the  
15 temperature of the consignment.
4. A method of monitoring according to claim 1 or claim 2 including the step of communicating the data to an intermediate sender device provided at the location of the consignment and transmitting the data from the intermediate sender device to said central location.
- 20 5. A method of monitoring according to claim 4 including the step of determining the location of the consignment and including data representative of the determined location in said data transmitted to said central location.

- 13 -

6. A method of monitoring according to any one of the preceding claims including the step of storing said data in a storage means before transmission to said central location.
7. A method of monitoring according to claim 6 when appended to claims 4 or 5 wherein said storage means is provided in said intermediate sender device.
8. A method of monitoring according to anyone of the preceding claims wherein said database includes set point values associated with said consignment for one or more of said measured parameters and the method includes comparing measured values with corresponding set point values to determine whether the consignment is meeting  
10 predetermined conditions.
9. A method of monitoring according to claim 8 wherein said database includes consignment data for each consignment, including dispatch and product data.
10. A method of monitoring according to any one of the preceding claims including the step of providing secure communication access to said database to enable monitoring  
15 by enabled users of data available from said database.
11. A method of monitoring according to claim 10 wherein said secure communication access is provided via the Internet.
12. A system for monitoring a consignment of goods including:  
a sender device attachable to said consignment including a measurement means  
20 for measuring a predetermined parameter or parameters of said consignment;  
first communication means for transmitting a signal containing data  
representative of said measured parameter to a central location;

- 14 -

computer system means for maintaining a database relating to said consignment at said central location, said database including said data representative of said measured parameters.

13. A system for monitoring according to claim 12 wherein said parameter or  
5 parameters are measured continuously or at predetermined intervals and said data includes time indicative data associated with said measurements.

14. A system for monitoring according to claim 13 wherein the parameter is the temperature of the consignment.

15. A system for monitoring according to claim 12, claim 13 or claim 14 wherein  
10 said first communication means is included in said sender device for communicating the data to an intermediate sender device provided at the location of the consignment and a second communication means being included in said intermediate sender device for transmitting the data from the intermediate sender device to said central location.

16. A system for monitoring according to claim 15 including location determining  
15 means for determining the location of the consignment and means for including data representative of the determined location in said data transmitted to said central location.

17. A system for monitoring according to claim 16 wherein said location determining means includes a global positioning system.

18. A system for monitoring according to claim 16 or 17 wherein said location  
20 determining means is included in said intermediate sender device.

19. A system for monitoring according to any one of claims 12 to 18 including a storage means for storing said data before transmission to said central location.

- 15 -

20. A system for monitoring according to claim 19 when appended to any one of claims 15 to 18 wherein said storage means is provided in said intermediate sender device.

21. A system for monitoring according to any one of claims 12 to 20 wherein the  
5 sender device is disposable and battery powered.

22. A system for monitoring according to any one of claims 12 to 20 wherein the sender device is disposable and inductively powered from said intermediate sender device.


23. A system for monitoring according to anyone of claims 12 to 22 wherein said  
10 database includes set point values associated with said consignment for one or more of said measured parameters and said computer system means includes comparison means for comparing measured values with corresponding set point values to determine whether the consignment is meeting predetermined conditions.

24. A system for monitoring according to claim 23 wherein said database includes  
15 consignment data for each consignment, including dispatch and product data.

25. A system for monitoring according to any one of claims. 12 to 24 including a secure communication access means for providing access to said database to enable monitoring by enabled users of data available from said database.

26. A system for monitoring according to claim 25 wherein said secure  
20 communication access means provides said access via the Internet.

1/4

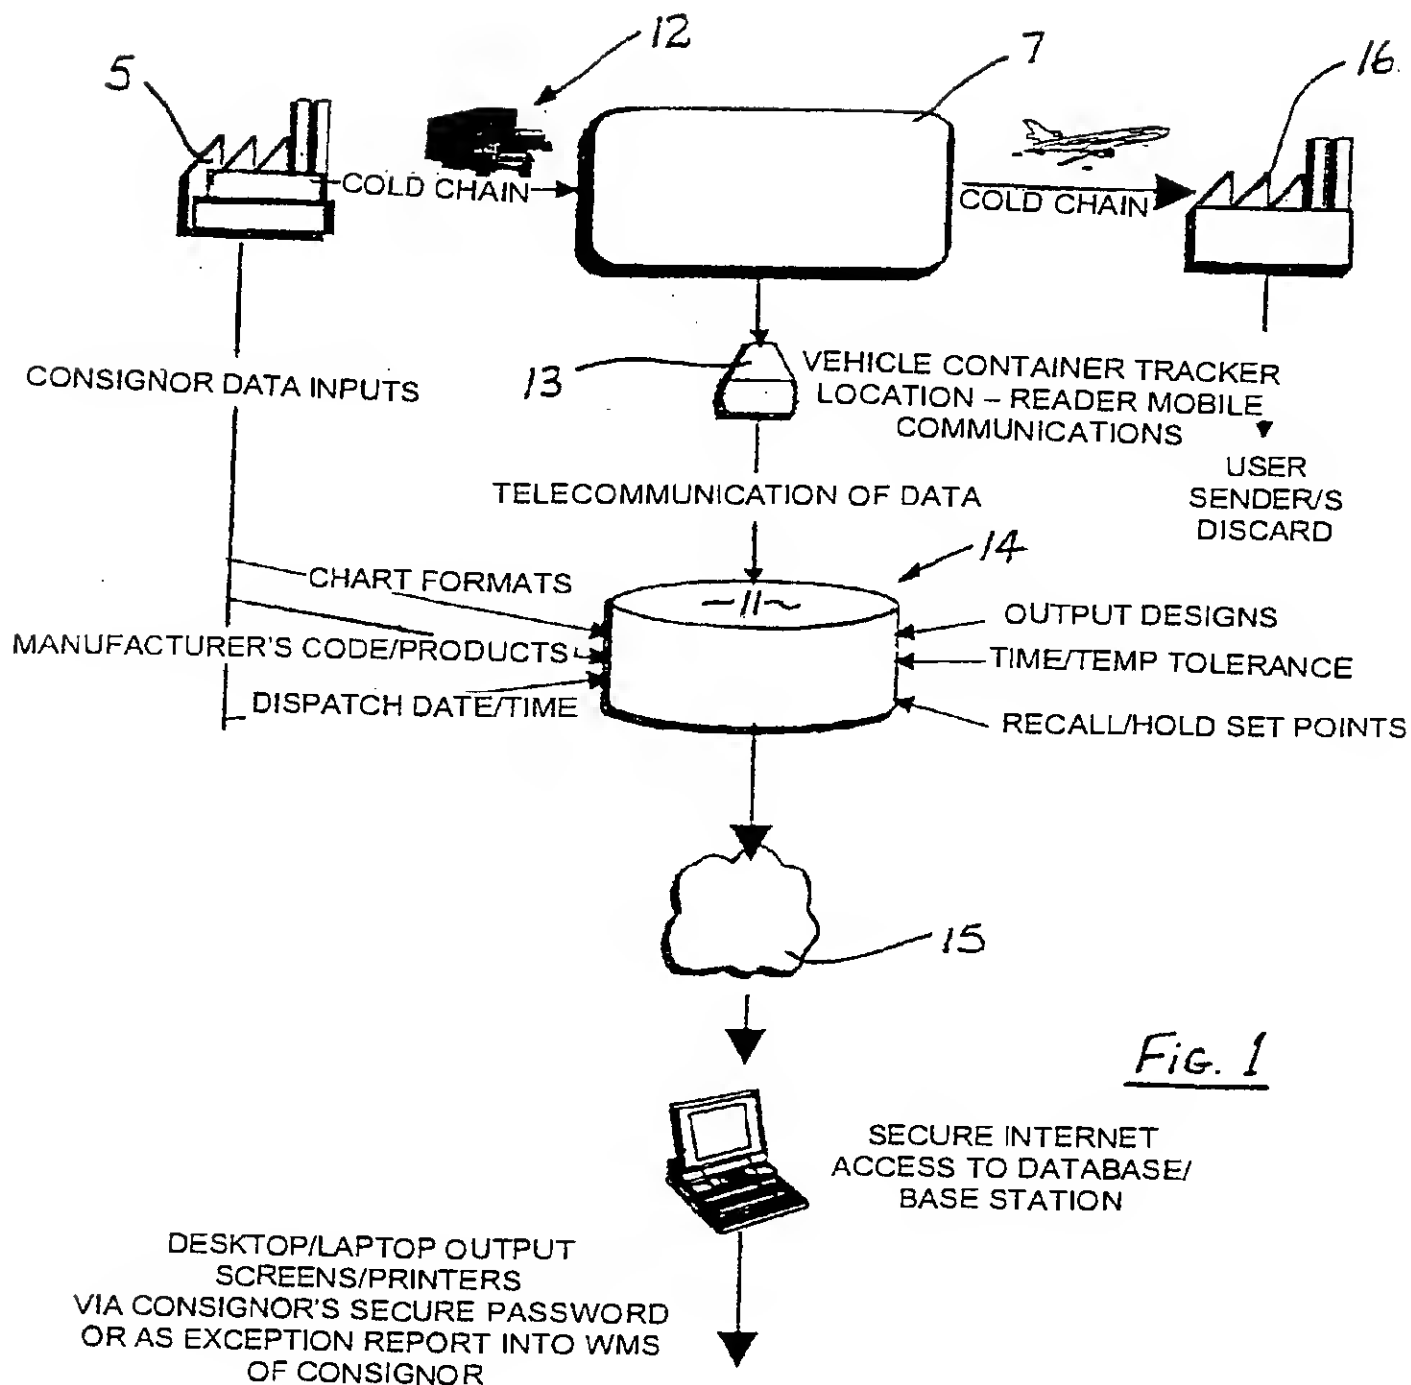Fig. 1

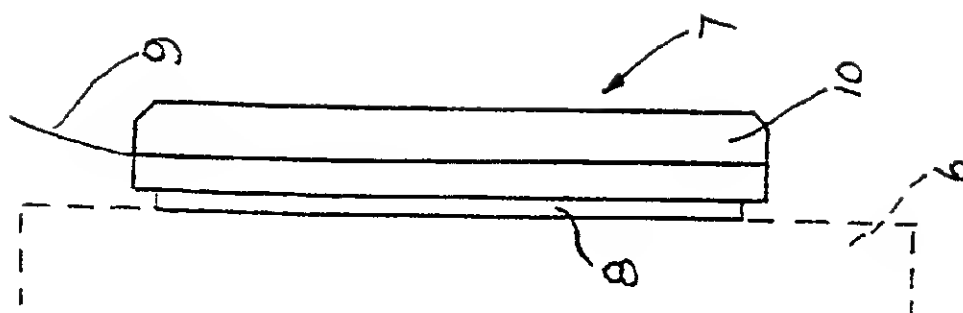


Fig. 2

Consignor Password (secure ****)	<b><u>Consignor Input Data for XYZ System</u></b> (Keyed into computer at time of Loading) Green Blue Black Red
<b><u>Consignment Attributes</u></b>	
Sender Type / Colour	
Sender Serial Number (***) (***) (***)	
Date / Time (yyyy/mm/dd/hh/mm)	
Expected Transit Time (dy/hr)	
Maximum Transit Temperature (°C)	
Pitch (Report signal interval in min.)	
Hotline Number (** ** *****)	
Alert 1 (red line)-Over Temperature (°C)	
Alert 2 (blue line)-Under Temperature °C)	
Consignor Company Code	
Consignor Location Code	
Consignor Product Code	
Consignor Batch Identity Code	
Consignee Order Number	
Consignee Destination (Country/City)	


**Fig. 3**



4/4

FIGURE 4

CONSIGNMENT TEMPERATURE / TIME CHART 11

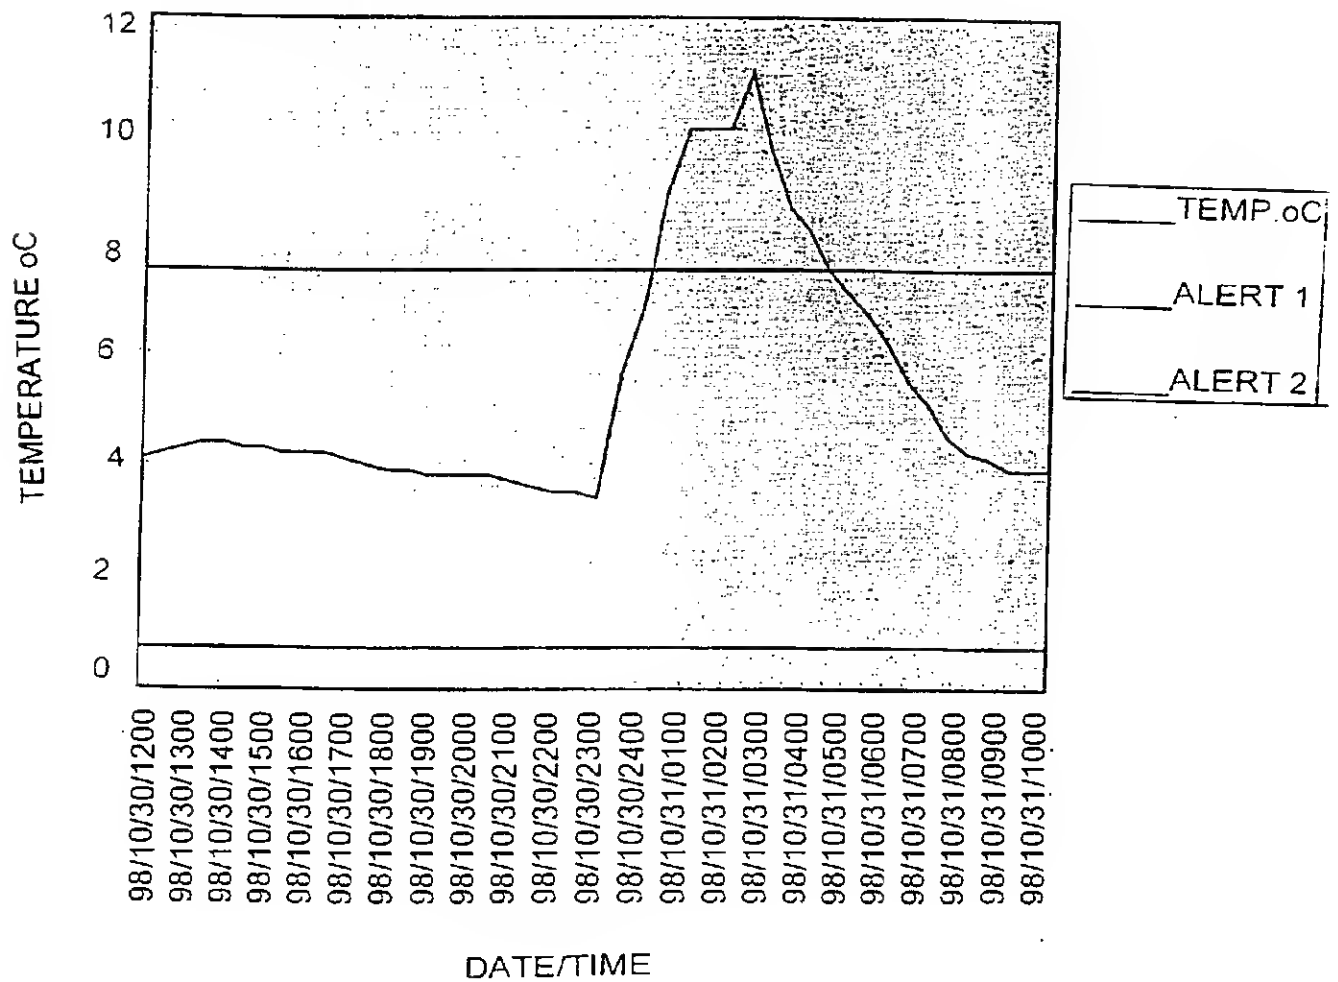

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU 99/00946

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>					
Int Cl <sup>6</sup> : B65D 79/02					
According to International Patent Classification (IPC) or to both national classification and IPC					
<b>B. FIELDS SEARCHED</b>					
Minimum documentation searched (classification system followed by classification symbols) IPC: G08B 23/-, 25/-, B65D 79/02, G08G 1/127, B60P 3/20					
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU: IPC as above					
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WPAT: with K/words					
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>					
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.			
X	WO 96/13022 A (HARJU B) 2 May 1996 Whole document	1-26			
X	US 5552772 A (JANKY et al) 3 Sept 1996 Whole document	1-26			
X	DE 19522392 A (HUBNER ELEKTRO UND SICHERHEITSSANLAGEN) 9 January 1997 Whole document	1-26			
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <span style="margin-left: 100px;"><input checked="" type="checkbox"/> See patent family annex</span>					
<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <p>* Special categories of cited documents:</p> <p>"A" Document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </td> <td style="width: 33%; vertical-align: top;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p> </td> <td style="width: 33%;"></td> </tr> </table>			<p>* Special categories of cited documents:</p> <p>"A" Document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>	
<p>* Special categories of cited documents:</p> <p>"A" Document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>				
Date of the actual completion of the international search 15 December 1999		Date of mailing of the international search report <b>05 JAN 2000</b>			
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200 WODEN ACT 2606 AUSTRALIA E-mail address: pct@ipaustalia.gov.au Facsimile No.: (02) 6285 3929		Authorized officer  <b>SOOSA GNANASINGHAM</b> Telephone No.: (02) 6283 2172			

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU 99/00946

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2710170 A (DIRLER SA) 24 March 1995 Whole document	1-26
X	DE 19649136 A (VOLKER D) 28 May 1998 Whole document	1-26
X	DE 29806583 U1 (HELICOM ENTWICKLUNGSGESELLSCHAFT FUR TELEKOMMUNIKATION UND MEDIEN-TECHNIK MBH) 30 July 1998 Whole document	1-26
X	Derwent Abstract Accession No. 98-282020/25, class X22, JP 10097691 A (OKI ELECTRIC IND CO LTD), 14 April 1998 Abstract	1,12
X	Derwent Abstract Accession No. 97-409486/38, Class W01W02W06, JP 091 82145 A (ICOM KK) 11 July 1997 Abstract	1,12
X	Derwent Abstract Accession No. 98-135622/13, Class W05, JP 10011674 A (NIPPON DENKI IDO TSUSHIN) 16 January 1998 Abstract	1,12

## INTERNATIONAL SEARCH REPORT

International application No.

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member	
WO	96/13022	AU	38206/95

END OF ANNEX